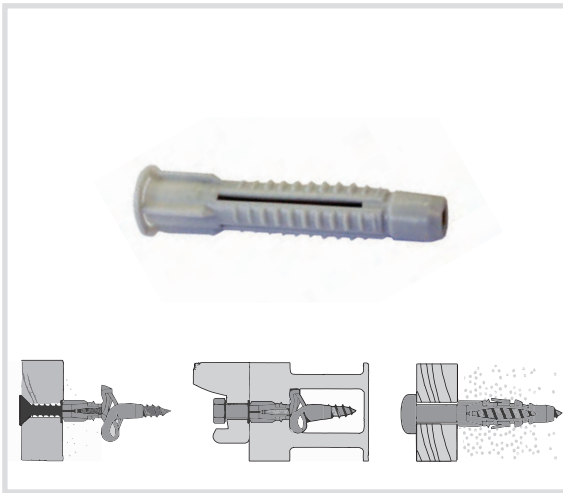


**Art. 8375 Universal anchor for drilled holes**

**Technical specifications and advantages**

- For light loads
- Suitable for solid and perforated materials
- In grey high density polyethylene (HDPE)
- The large wings prevent the anchor from turning

Code	Diameter [mm]	Length [mm]	Suitable for screws Ø [mm]
<b>837506</b>	6	30	3,5
<b>837508</b>	8	48	4,5
<b>837510</b>	10	59	6
<b>837512</b>	12	71	8

**Art. 924 Anchor for thermal insulation**

**Technical specifications and advantages**

- Suitable for thermal insulation
- Tested for wood, high density polyurethane, polystyrene and composite materials
- White polyamide
- Self-tapping
- For light loads

Code	Length [mm]	Suitable for screws Ø [mm]	Min. screw insertion [mm]	Max screw insertion [mm]
<b>924060</b>	60	4 - 6	30	50
<b>924095</b>	95	8 - 10 - M8	40	80

**Art. 834 Anchors**

**Technical specifications and advantages**

- For light loads
- Made of high density polyethylene (HDPE), grey (RAL 9002)

Code	Diameter [mm]	Length [mm]	Suitable for screws Ø [mm]
<b>834006</b>	6	30	3,5:5
<b>834008</b>	8	40	4,5:6
<b>834510</b>	10	50	6:8
<b>834010</b>	10	60	6:8
<b>834012</b>	12	60	8:10
<b>834014</b>	14	75	10:12