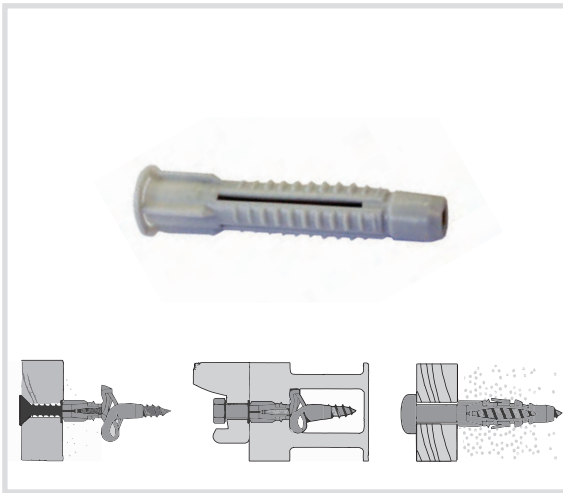


Art. 8375 Universal anchor for drilled holes

Technical specifications and advantages

- For light loads
- Suitable for solid and perforated materials
- In grey high density polyethylene (HDPE)
- The large wings prevent the anchor from turning

Code	Diameter [mm]	Length [mm]	Suitable for screws Ø [mm]
837506	6	30	3,5
837508	8	48	4,5
837510	10	59	6
837512	12	71	8

Art. 924 Anchor for thermal insulation

Technical specifications and advantages

- Suitable for thermal insulation
- Tested for wood, high density polyurethane, polystyrene and composite materials
- White polyamide
- Self-tapping
- For light loads

Code	Length [mm]	Suitable for screws Ø [mm]	Min. screw insertion [mm]	Max screw insertion [mm]
924060	60	4 - 6	30	50
924095	95	8 - 10 - M8	40	80

Art. 834 Anchors

Technical specifications and advantages

- For light loads
- Made of high density polyethylene (HDPE), grey (RAL 9002)

Code	Diameter [mm]	Length [mm]	Suitable for screws Ø [mm]
834006	6	30	3,5:5
834008	8	40	4,5:6
834510	10	50	6:8
834010	10	60	6:8
834012	12	60	8:10
834014	14	75	10:12