


Mensola a binario CorSTRUT

Sospensione 1 punto

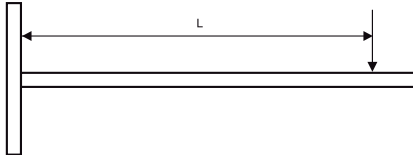

L (mm)	singolo						
	41x21 1,5	41x21 2,0	41x41 1,5	41x41 2,0	41x41 2,5	41x62 2,5	41x82 2,5
100	1,155	1,488	3,392	4,098	4,757	9,206	14,397
150	770	992	2,261	2,732	3,171	6,138	9,598
200	557	719	1,696	2,049	2,378	4,603	7,198
250	356	460	1,357	1,639	1,903	3,683	5,759
300	247	320	1,131	1,366	1,586	3,069	4,799
350	182	235	969	1,171	1,359	2,630	4,113
400	139	180	794	952	1,114	2,302	3,599
450	110	142	628	752	881	2,046	3,199
500	89	115	508	609	713	1,841	2,879
550	74	95	420	504	589	1,674	2,618
600	62	80	353	423	495	1,427	2,399
700	45	59	259	311	364	1,048	2,057
800	35	45	199	238	279	803	1,661
900	27	36	157	188	220	634	1,313
1.000	22	29	127	152	178	514	1,063
1.100	18	24	105	126	147	425	879
1.200	15	20	88	106	124	357	738
1.300	13	17	75	90	106	304	629
1.400	11	15	65	78	91	262	542
1.500	-	13	56	68	79	228	473

doppio			
41x21D	41x41D	41x62D	41x82D
4,426	14,253	20,429	26,269
2,950	9,502	13,619	17,513
2,213	7,126	10,214	13,134
1,770	5,701	8,172	10,508
1,475	4,751	6,810	8,756
1,264	4,072	5,837	7,505
1,015	3,563	5,107	6,567
802	3,167	4,540	5,838
650	2,851	4,086	5,254
537	2,591	3,714	4,776
451	2,375	3,405	4,378
331	2,036	2,918	3,753
254	1,638	2,554	3,284
200	1,295	2,270	2,919
162	1,049	2,043	2,627
134	867	1,857	2,388
113	728	1,702	2,189
96	620	1,571	2,021
83	535	1,459	1,876
72	466	1,362	1,751

Max carico utile in N.

I valori riportati sono validi solo per il profilo.

Il carico utile massimo di tutte le altre parti della costruzione devono essere verificati.