


Art. 660 JUNCO Flex® Hoses FF, MF, MPF, MB, MPB

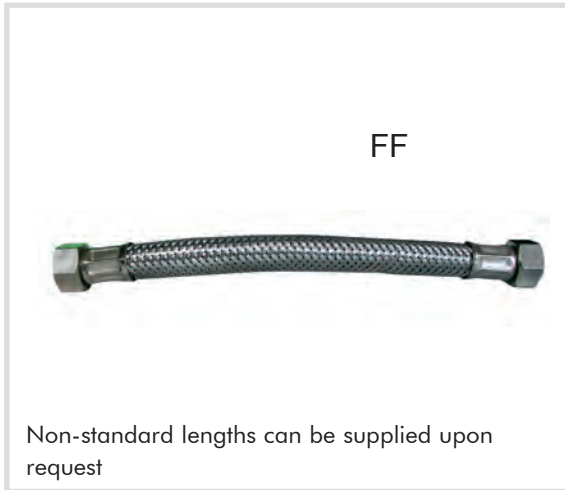

Technical specifications and advantages

- 8 wire braid in AISI 304 stainless steel, diameter 13 mm
- Rubber coverage $\geq 95\%$
- Brass female fittings
- Bushes in annealed chromed brass or in stainless steel
- Marked with "CORH" and year of manufacture
- Non-toxic EPDM rubber, suitable for the passage of drinking water according to Italian Min. Dec.174:2004
- Pre-assembled gasket on request
- Operating temperature from $-10\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$
- Pack of 25 pcs in cardboard box
- Assembly instructions in the package
- Temperature peaks up to $110\text{ }^{\circ}\text{C}$ are permitted

Code without gasket	Code with gasket	Description	L [cm]
660FF1115	660FF1115G	3/8 Female x 3/8 Female	15
660FF1120	660FF1120G	3/8 Female x 3/8 Female	20
660FF1125	660FF1125G	3/8 Female x 3/8 Female	25
660FF1130	660FF1130G	3/8 Female x 3/8 Female	30
660FF1135	660FF1135G	3/8 Female x 3/8 Female	35
660FF1140	660FF1140G	3/8 Female x 3/8 Female	40
660FF1150	660FF1150G	3/8 Female x 3/8 Female	50
660FF1160	660FF1160G	3/8 Female x 3/8 Female	60
660FF1180	660FF1180G	3/8 Female x 3/8 Female	80
660FF1199	660FF1199G	3/8 Female x 3/8 Female	100
660FF1215	660FF1215G	3/8 Female x 1/2 Female	15
660FF1220	660FF1220G	3/8 Female x 1/2 Female	20
660FF1225	660FF1225G	3/8 Female x 1/2 Female	25
660FF1230	660FF1230G	3/8 Female x 1/2 Female	30
660FF1235	660FF1235G	3/8 Female x 1/2 Female	35
660FF1240	660FF1240G	3/8 Female x 1/2 Female	40
660FF1250	660FF1250G	3/8 Female x 1/2 Female	50
660FF1260	660FF1260G	3/8 Female x 1/2 Female	60
660FF1280	660FF1280G	3/8 Female x 1/2 Female	80
660FF1299	660FF1299G	3/8 Female x 1/2 Female	100
660FF2215	660FF2215G	1/2 Female x 1/2 Female	15
660FF2220	660FF2220G	1/2 Female x 1/2 Female	20
660FF2225	660FF2225G	1/2 Female x 1/2 Female	25
660FF2230	660FF2230G	1/2 Female x 1/2 Female	30
660FF2235	660FF2235G	1/2 Female x 1/2 Female	35
660FF2240	660FF2240G	1/2 Female x 1/2 Female	40
660FF2250	660FF2250G	1/2 Female x 1/2 Female	50
660FF2260	660FF2260G	1/2 Female x 1/2 Female	60
660FF2280	660FF2280G	1/2 Female x 1/2 Female	80
660FF2299	660FF2299G	1/2 Female x 1/2 Female	100