


Art. 8840 Rubber profile for clamp soundproofing

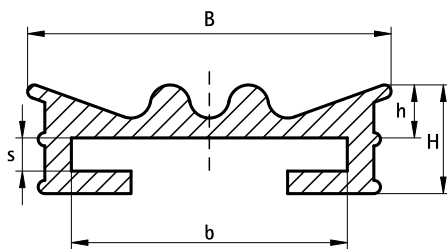


Technical specifications and advantages

- Extruded profile
- Noise insulation according to DIN 4109
- EPDM rubber resistant to ageing
- Free from chlorine and derivatives
- Resistant to ozone, UV, atmospheric agents, sea water
- Colour: Black
- Hardness 45 ± 5 Shore A
- Temperature resistance from -50° to $+110^{\circ}\text{C}$

Code	L (m)	B (mm)	H (mm)	h (mm)	b x s (mm)
8840204	180	26	8,0	4,0	20 x 1,5
8840254	140	31	8,5	4,0	25 x 3,0
8840304	140	47	10,5	4,0	30 x 3,0
8840404	25	47	10,5	4,0	40 x 4,0
8850505	25	53	11,5	4,0	50 x 5,0

Art. 0845 Silicone rubber profile for clamps

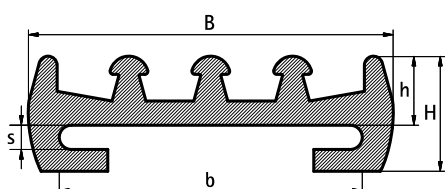

Technical specifications and advantages

- Extruded profile
- Noise insulation according to DIN 4109
- Material: silicone rubber, red, ageing resistant
- Free from chlorine and derivatives
- Resistant to ozone, UV, atmospheric agents, sea water
- Hardness 45 ± 5 Shore A
- Temperature resistance up to 200°C

Code	L (m)	B (mm)	H (mm)	h (mm)	b x s (mm)
0845205	30	25,0	7,5	4,0	20 x 1,5
0845255	50	30,0	9,5	5,5	25 x 2,0
0845304	50	35,4	8,7	4,0	30 x 3,0