


Art. 21819 CORH BK-N fire bags



Technical specifications and advantages

- Can be used for temporary or permanent closure
- Very easy to use
- Very flexible system for the installation of cables, conduits, telecommunication cables, etc.
- No additional sealant is required
- Fire resistance up to EI 180
- ETA certificate, CE marked

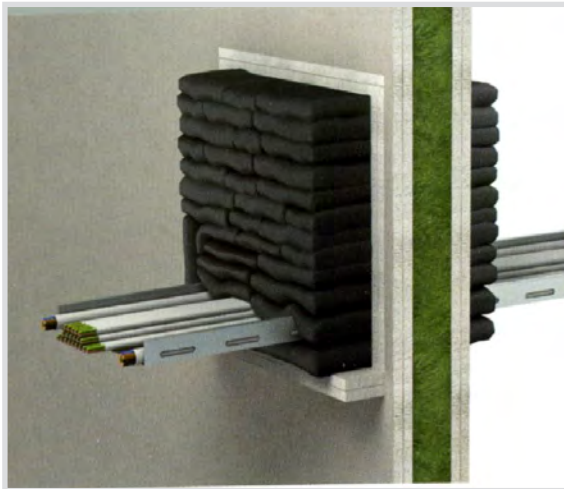

	Wall (concrete)	Ceiling	Wall in lightweight materials
Thickness	≥100 mm	≥150 mm	≥100 mm
Max sealable opening	600x600	600x600	600x600
Minimum sealable thickness	250 mm	250 mm	250 mm



Code	Dimension
218190	250 x 60 x 30 mm
218191	250 x 130 x 35 mm
218192	250 x 180 x 35 mm

SPECIFICATION ITEM

CORH BK-N - Supply and installation of CORH BK-N fire bags, having fire resistance characteristics up to EI 180, tested in compliance with EN 1366-3 to be installed for the crossing of cables, ducts, telecommunication conduits, plastic or steel diameter ≤ 16 mm. ETA certified and with CE marking.