


Art. 414 Clamp with rubber lining for ducts - M8/M10



Technical specifications and advantages

- Quick and easy to assemble
- Metal part in pre-galvanised steel
- TPE fixing rail, black, resistant to ageing
- Noise insulation according to DIN 4109
- M8/M10 welded nut

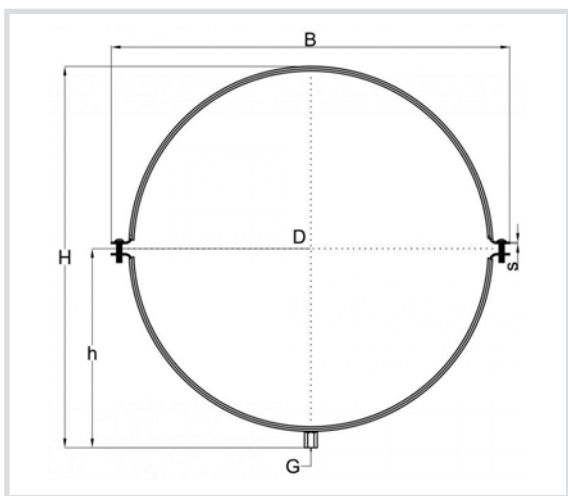

Code	D [mm]	G	B [mm]	H [mm]	b x s [mm]
414080	80	M8/M10	125	109	20 x 1,5
414100	100	M8/M10	149	129	20 x 1,5
414125	125	M8/M10	180	154	20 x 1,5
414140	140	M8/M10	189	169	20 x 1,5
414150	150	M8/M10	202	179	20 x 1,5
414160	160	M8/M10	222	189	20 x 1,5
414180	180	M8/M10	243	209	20 x 1,5
414200	200	M8/M10	259	229	20 x 1,5
414225	225	M8/M10	288	253	25 x 2
414250	250	M8/M10	304	279	25 x 2
414280	280	M8/M10	358	309	25 x 2
414300	300	M8/M10	373	329	25 x 2
414315	315	M8/M10	386	344	25 x 2
414355	355	M8/M10	445	384	25 x 2
414400	400	M8/M10	493	429	25 x 2
414450	450	M8/M10	540	483	25 x 2
414500	500	M8/M10	591	532	25 x 2
414560	560	M8/M10	635	591	25 x 2
414600	600	M8/M10	675	631	25 x 2
414630	630	M8/M10	706	664	25 x 2
414710	710	M8/M10	796	741	25 x 2
414800	800	M8/M10	898	835	25 x 2
414900	900	M8/M10	1010	935	25 x 2
4141000	1000	M8/M10	1150	1040	25 x 2
4141120	1120	M8/M10	1260	1160	25 x 2
4141250	1250	M8/M10	1392	1290	25 x 2

