


Art. 660 JUNCO Flex®
Stainless steel braiding



Non-standard lengths can be supplied upon request

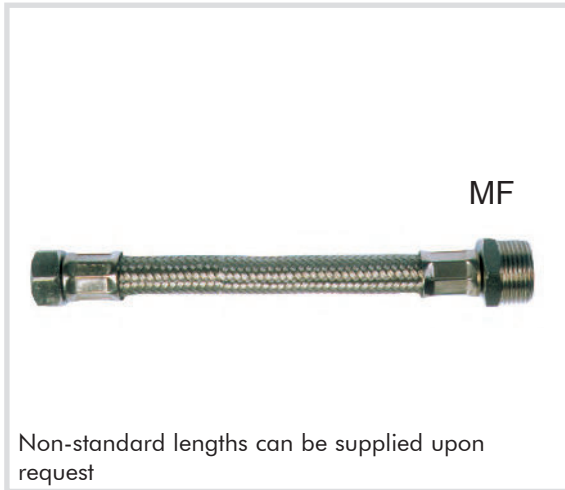


Pre-assembled gasket on request

Technical specifications and advantages

- 8 wire braid in AISI 304 stainless steel, diameter 13 mm
- Rubber coverage $\geq 95\%$
- Brass female fittings
- Bushes in annealed chromed brass or in stainless steel
- Marked with "CORH" and year of manufacture
- Non-toxic EPDM rubber, suitable for the passage of drinking water according to Italian Min. Dec.174:2004
- Operating temperature from $-10\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$
- Pack of 25 pcs in cardboard box
- Assembly instructions in the package
- Temperature peaks up to $110\text{ }^{\circ}\text{C}$ are permitted
- Male in nickel-plated brass, broached
- Knurled male for greater gripping of the sealing material (hemp or Teflon)

Code without gasket	Code with gasket	Description	L [cm]
660MF1115	660MF1115G	3/8 Male x 3/8 Female	15
660MF1120	660MF1120G	3/8 Male x 3/8 Female	20
660MF1125	660MF1125G	3/8 Male x 3/8 Female	25
660MF1130	660MF1130G	3/8 Male x 3/8 Female	30
660MF1135	660MF1135G	3/8 Male x 3/8 Female	35
660MF1140	660MF1140G	3/8 Male x 3/8 Female	40
660MF1150	660MF1150G	3/8 Male x 3/8 Female	50
660MF1160	660MF1160G	3/8 Male x 3/8 Female	60
660MF1180	660MF1180G	3/8 Male x 3/8 Female	80
660MF1199	660MF1199G	3/8 Male x 3/8 Female	100
660MF2115	660MF2115G	1/2 Male x 3/8 Female	15
660MF2120	660MF2120G	1/2 Male x 3/8 Female	20
660MF2125	660MF2125G	1/2 Male x 3/8 Female	25
660MF2130	660MF2130G	1/2 Male x 3/8 Female	30
660MF2135	660MF2135G	1/2 Male x 3/8 Female	35
660MF2140	660MF2140G	1/2 Male x 3/8 Female	40
660MF2150	660MF2150G	1/2 Male x 3/8 Female	50
660MF2160	660MF2160G	1/2 Male x 3/8 Female	60
660MF2180	660MF2180G	1/2 Male x 3/8 Female	80
660MF2199	660MF2199G	1/2 Male x 3/8 Female	100
660MF2215	660MF2215G	1/2 Male x 1/2 Female	15
660MF2220	660MF2220G	1/2 Male x 1/2 Female	20
660MF2225	660MF2225G	1/2 Male x 1/2 Female	25
660MF2230	660MF2230G	1/2 Male x 1/2 Female	30
660MF2235	660MF2235G	1/2 Male x 1/2 Female	35
660MF2240	660MF2240G	1/2 Male x 1/2 Female	40
660MF2250	660MF2250G	1/2 Male x 1/2 Female	50
660MF2260	660MF2260G	1/2 Male x 1/2 Female	60
660MF2280	660MF2280G	1/2 Male x 1/2 Female	80
660MF2299	660MF2299G	1/2 Male x 1/2 Female	100
660MF1215	660MF1215G	3/8 Male x 1/2 Female	15
660MF1220	660MF1220G	3/8 Male x 1/2 Female	20
660MF1225	660MF1225G	3/8 Male x 1/2 Female	25
660MF1230	660MF1230G	3/8 Male x 1/2 Female	30
660MF1235	660MF1235G	3/8 Male x 1/2 Female	35
660MF1240	660MF1240G	3/8 Male x 1/2 Female	40
660MF1250	660MF1250G	3/8 Male x 1/2 Female	50
660MF1260	660MF1260G	3/8 Male x 1/2 Female	60
660MF1280	660MF1280G	3/8 Male x 1/2 Female	80
660MF1299	660MF1299G	3/8 Male x 1/2 Female	100

Art. 660 JUNCO Flex® tainless steel braiding

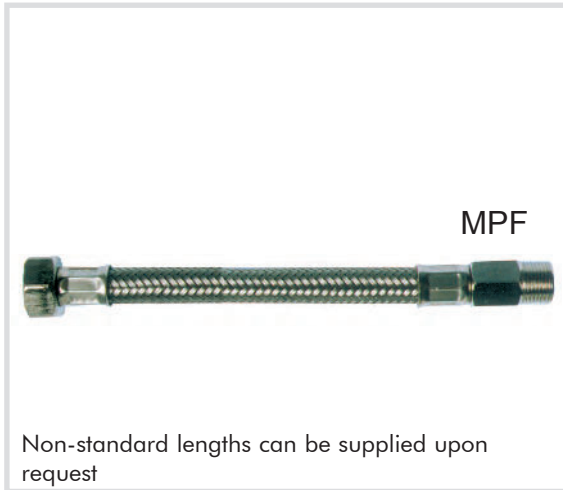

Technical specifications and advantages

- 8 wire braid in AISI 304 stainless steel, diameter 13 mm
- Rubber coverage $\geq 95\%$
- Brass female fittings
- Bushes in annealed chromed brass or in stainless steel
- Marked with "CORH" and year of manufacture
- Non-toxic EPDM rubber, suitable for the passage of drinking water according to Italian Min. Dec.174:2004
- Operating temperature from $-10\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$
- Pack of 25 pcs in cardboard box
- Assembly instructions in the package
- Temperature peaks up to $110\text{ }^{\circ}\text{C}$ are permitted
- Male in nickel-plated brass, broached
- Knurled male for greater gripping of the sealing material (hemp or Teflon)

Code without gasket	Code with gasket	Description	L [cm]
660MPF1115	660MPF1115G	Extended Male 3/8 x Female 3/8	15
660MPF1120	660MPF1120G	Extended Male 3/8 x Female 3/8	20
660MPF1125	660MPF1125G	Extended Male 3/8 x Female 3/8	25
660MPF1130	660MPF1130G	Extended Male 3/8 x Female 3/8	30
660MPF1135	660MPF1135G	Extended Male 3/8 x Female 3/8	35
660MPF1140	660MPF1140G	Extended Male 3/8 x Female 3/8	40
660MPF1150	660MPF1150G	Extended Male 3/8 x Female 3/8	50
660MPF1160	660MPF1160G	Extended Male 3/8 x Female 3/8	60
660MPF1180	660MPF1180G	Extended Male 3/8 x Female 3/8	80
660MPF1199	660MPF1199G	Extended Male 3/8 x Female 3/8	100
660MPF2115	660MPF2115G	Extended Male 1/2 x Female 3/8	15
660MPF2120	660MPF2120G	Extended Male 1/2 x Female 3/8	20
660MPF2125	660MPF2125G	Extended Male 1/2 x Female 3/8	25
660MPF2130	660MPF2130G	Extended Male 1/2 x Female 3/8	30
660MPF2135	660MPF2135G	Extended Male 1/2 x Female 3/8	35
660MPF2140	660MPF2140G	Extended Male 1/2 x Female 3/8	40
660MPF2150	660MPF2150G	Extended Male 1/2 x Female 3/8	50
660MPF2160	660MPF2160G	Extended Male 1/2 x Female 3/8	60
660MPF2180	660MPF2180G	Extended Male 1/2 x Female 3/8	80
660MPF2199	660MPF2199G	Extended Male 1/2 x Female 3/8	100
660MPF2215	660MPF2215G	Extended Male 1/2 x Female 1/2	15
660MPF2220	660MPF2220G	Extended Male 1/2 x Female 1/2	20
660MPF2225	660MPF2225G	Extended Male 1/2 x Female 1/2	25
660MPF2230	660MPF2230G	Extended Male 1/2 x Female 1/2	30
660MPF2235	660MPF2235G	Extended Male 1/2 x Female 1/2	35
660MPF2240	660MPF2240G	Extended Male 1/2 x Female 1/2	40
660MPF2250	660MPF2250G	Extended Male 1/2 x Female 1/2	50
660MPF2260	660MPF2260G	Extended Male 1/2 x Female 1/2	60
660MPF2280	660MPF2280G	Extended Male 1/2 x Female 1/2	80
660MPF2299	660MPF2299G	Extended Male 1/2 x Female 1/2	100
660MPF1215	660MPF1215G	Extended Male 3/8 x Female 1/2	15
660MPF1220	660MPF1220G	Extended Male 3/8 x Female 1/2	20
660MPF1225	660MPF1225G	Extended Male 3/8 x Female 1/2	25
660MPF1230	660MPF1230G	Extended Male 3/8 x Female 1/2	30
660MPF1235	660MPF1235G	Extended Male 3/8 x Female 1/2	35
660MPF1240	660MPF1240G	Extended Male 3/8 x Female 1/2	40
660MPF1250	660MPF1250G	Extended Male 3/8 x Female 1/2	50
660MPF1260	660MPF1260G	Extended Male 3/8 x Female 1/2	60
660MPF1280	660MPF1280G	Extended Male 3/8 x Female 1/2	80
660MPF1299	660MPF1299G	Extended Male 3/8 x Female 1/2	100