



Art. 734 VM Profile

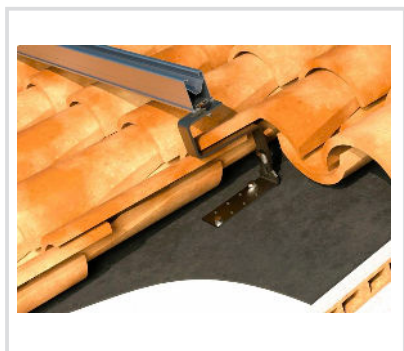

Technical features and advantages

- VM profile for fixing solar panels to roofs
- Suitable for coplanar and triangular applications
- General profile thickness 1.8 mm
- Material: aluminum
- The upper part of the profile has a 41 mm guide
- It is possible to use VM connectors to achieve non-standard profile dimensions
- Non-perforated profile
- It is possible to fix the profile to the roof via lateral hooking or from below with the relevant
- fixing components
- It can be fixed to the roof using under-tile brackets, for tiles, frets or tie rods
- Profile guide 41, therefore compatible with all CorSTRUT components

Code	Base width (mm)	Height (mm)	Length (mm)	Profile guide (mm)
7231250	47	60	1250	41
7231875	47	60	1875	41
7232500	47	60	2500	41
7233625	47	60	3625	41